
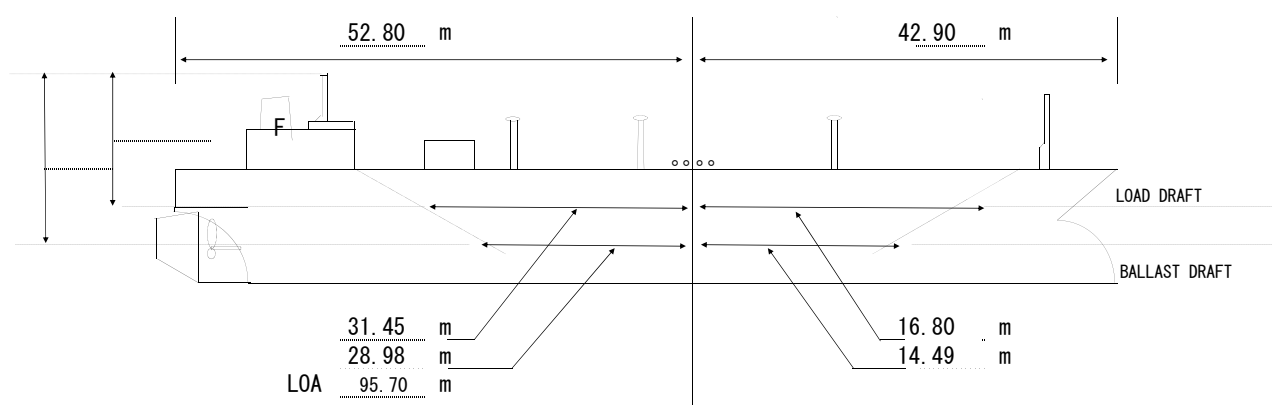
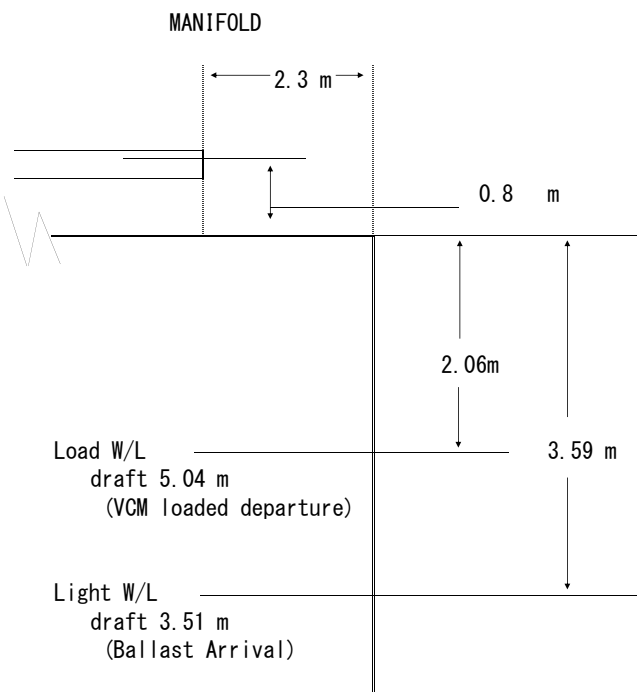


|                              |  |           |
|------------------------------|--|-----------|
| SNO. 132                     | <b>BRIT KOSAN</b>  |           |
| TYPE                         | PRESSURIZED  |           |
| BUILT                        | 1999 FEB   |           |
| FLAG                         | Singapore  |           |
| CLASS                        | NK   |           |
| QUALIFICATION                | IMO TYPE IIPG  |           |
| CALL. SIGN                   | S6BE5  |           |
| TEL NO.                      | 773 230 758  |           |
| FAX NO.                      | 783 204 527  |           |
| DATA NO.                     |  |           |
| E-MAIL ADDRESS               | master.britkosan@amosconnect.com   |           |
| TELEX NO.                    | 456539310 a/b BRK0   |           |
| DW (MT)                      | 3,354.38   |           |
| INTERNATIONAL TONNAGE        | 3,433.00   |           |
| DOMESTIC TONNAGE             | —  |           |
| NET TON                      | 1,030.00   |           |
| LOA (M)                      | 95.70  |           |
| BREADTH (M)                  | 16.00  |           |
| DEPTH (M)                    | 7.10   |           |
| SUMMER DRAFT (M)             | 5.073  |           |
| MAX DRAFT (M)                |  |           |
| TANK CAPACITY (CBM)          | Total  | 3,513.207 |
| (NUMBER)                     | No. 1  | 1,756.692 |
|                              | No. 2  | 1,576.515 |
| MAX. PRESSURE                | 18.0 KG/CM2  |           |
| MIN. TEMP.                   | 0 DEG. C   |           |
| CARGO SEGREGATION            | ONE GRADE  |           |
| LOADABLE CARGOES             | PROPANE, PROPYLENE<br>BUTANE<br>P/B MIXTURES, ISOPRENE<br>BUTADIENE, BUTYLENE<br>PENTANE, PENTENE, VCM |           |
| I. G. PLANT                  | NITROGEN GENERATOR   |           |
| (CAPACITY)                   | 200 m3/hr  |           |
| (CONTAINTS)                  | AR 1.2 %, CO2 3 PPM<br>HC 4 PPM, H2O 2 PPM<br>O2 0.1 %, N2 REMAIN                                      |           |
| (LOWEST DEWPOINT ACHIEVABLE) | - 60 C   |           |
| CARGO RE-HEATER (TYPE)       |  |           |
| (NUMBER)                     |  |           |
| (HEATING MEDIUM)             |  |           |
| (SPEC FOR PROPANE)           |  |           |
| FROM - 45 TO 0 C)            |  |           |
| CARGO PUMPS (TYPE)           | DEEPWELL   |           |
| (CAPACITY-CBM/HR)            | 300/250 (VCM)  |           |
| (NUMBER)                     | 2  |           |
| CARGO COMPRESSORE (TYPE)     | OIL-FREE   |           |
| (CAPACITY-CBM/HR)            | 460 m3/hr  |           |
| (NUMBER)                     | 2  |           |
| MAIN ENGINE                  | DIESEL   |           |
| (SERVICE POWER)              | 3,300 HP   |           |

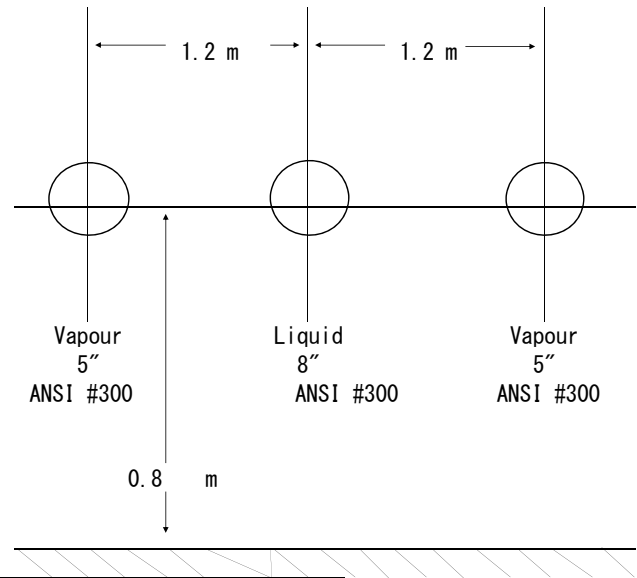

MANIFOLD