

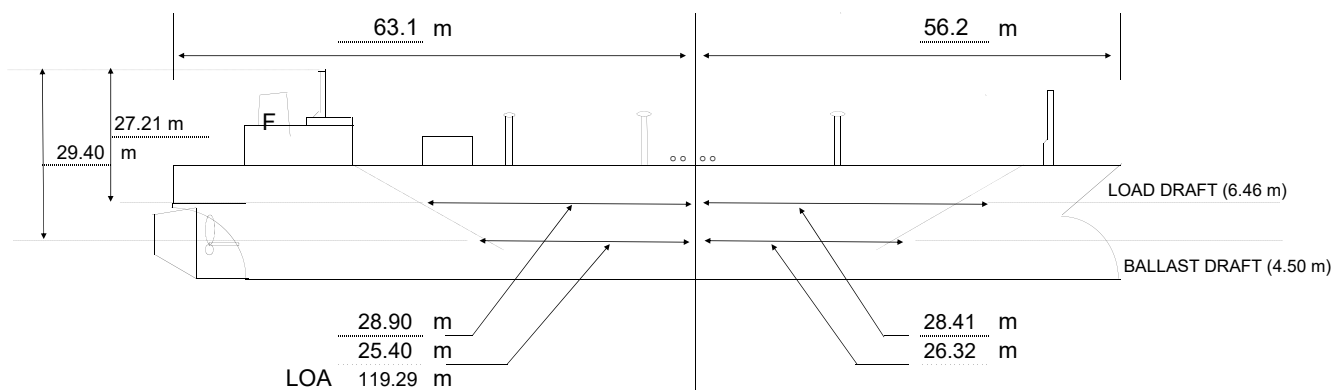


SNO. 533		GAZ INTERCEPTOR	
TYPE	PRESSURIZED		
BUILT	31-Mar-2006		
FLAG	PANAMA		
CLASS	Class NK		
QUALIFICATION	IMO TYPE IIPG		
CALL. SIGN	3EEO2		
TEL NO.	773 152 896		
FAX NO.	783 254 020		
DATA NO.			
E-MAIL ADDRESS	<a href="mailto:master.gazinterceptor@amosconnect.com">master.gazinterceptor@amosconnect.com</a>		
TELEX NO.	435 125 910		
DW(MT)	6,533.38		
INTERNATIONAL TONNAGE	5,835.00		
DOMESTIC TONNAGE	-		
NET TON	2,091.00		
LOA (M)	119.29		
BREADTH (M)	18.20		
DEPTH (M)	8.40		
SUMMER DRAFT (M)	6.46		
MAX DRAFT (M)	6.64M		
	DISPLACEMENT 10,414.99 MT (6,241.74 DWT)		
	IFO=637.00 M3, MDO=147.90 M3, F/W=249.78 M3, B/W=3,133.03 M3		
TANK CAPACITY (CBM) - 98%	Total	7,539.040	
(NUMBER)	No. 1	3,772.002	
	No. 2	3,767.038	
MAX. PRESSURE	1.77 Mpa (18.0 KG/CM2)		
MIN. TEMP.	- 5 DEG.C		
CARGO SEGREGATION	ONE GRADE		
LOADABLE CARGOES	PROPANE, PROPYLENE		
	I-BUTANE, N-BUTANE		
	P/B MIXTURES, ISOPRENE		
	BUTADIENE, BUTYLENE		
	VCM		
I.G.PLANT	NITROGEN GENERATOR		
(CAPACITY)	340 / 185 m3/hr		
(CONTAINTS)	O2 : below 5,000ppm,		
	CO2 : below 5ppm,		
	N2+Ar : 99.5 vol %		
(LOWEST DEWPOINT ACHIEVABLE)	- 50 Deg.C		
CARGO RE-HEATER(TYPE)	Shell / Tube type		
(NUMBER)	1		
(HEATING MEDIUM)	Seawater		
(SPEC FOR PROPANE FROM - 45 TO 0 C)			
CARGO PUMPS(TYPE)	DEEPWELL		
(CAPACITY-CBM/HR)	450 M3/HR		
(NUMBER)	2		
CARGO COMPRESSORE (TYPE)	Water cooled stage double acting oilless		
(CAPACITY-CBM/HR)	467 M4/HR		
(NUMBER)	2		
MAIN ENGINE	DIESEL		
(SERVICE POWER)	4530 KW		

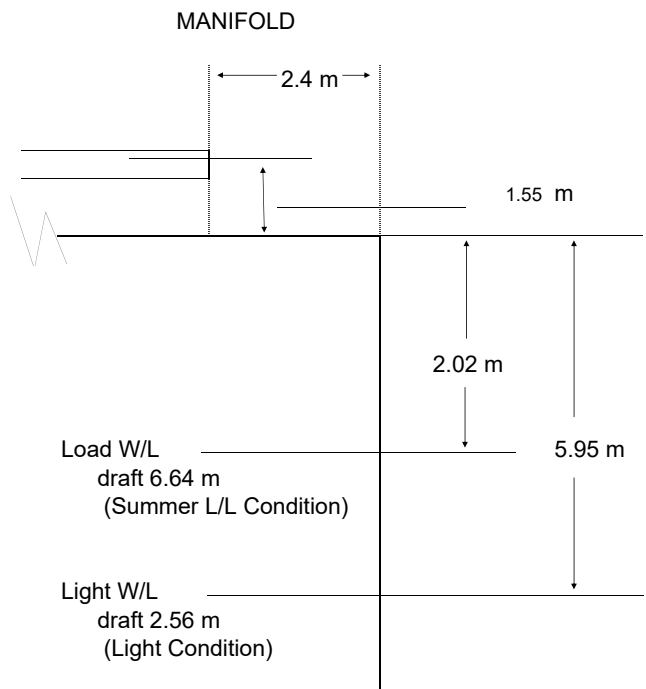

MANIFOLD

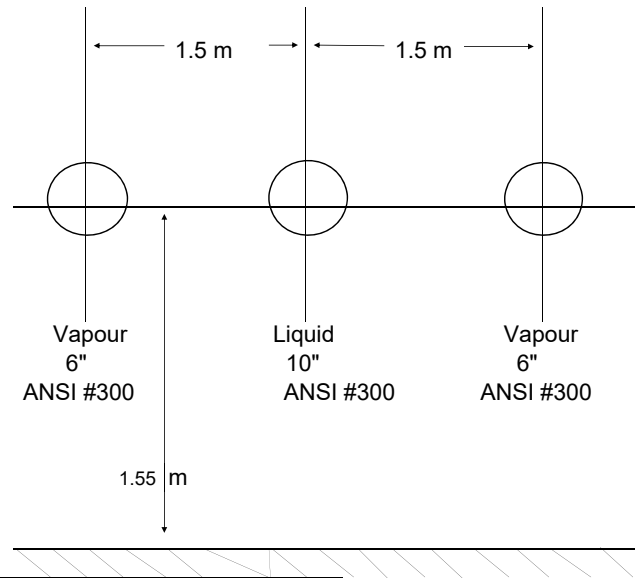